



END ELEVATION

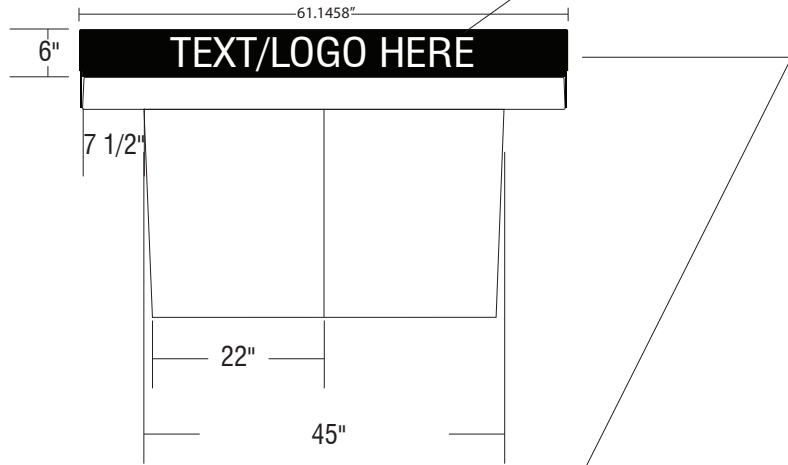

LETTERING TO READ CORRECTLY
 FROM BOTH SIDES - NO MIRROR
 IMAGE REVERSE TEXT ON SECOND
 SIDE


TABLE NET TO BE STEEL LASER CUT
 WITH TEXT AS SHOWN. ATTACHED TO TABLE
 VIA WELDED SIDE BRACKETS BOLTED TO
 CAST IN INSERTS IN TABLE SIDES

PLAN

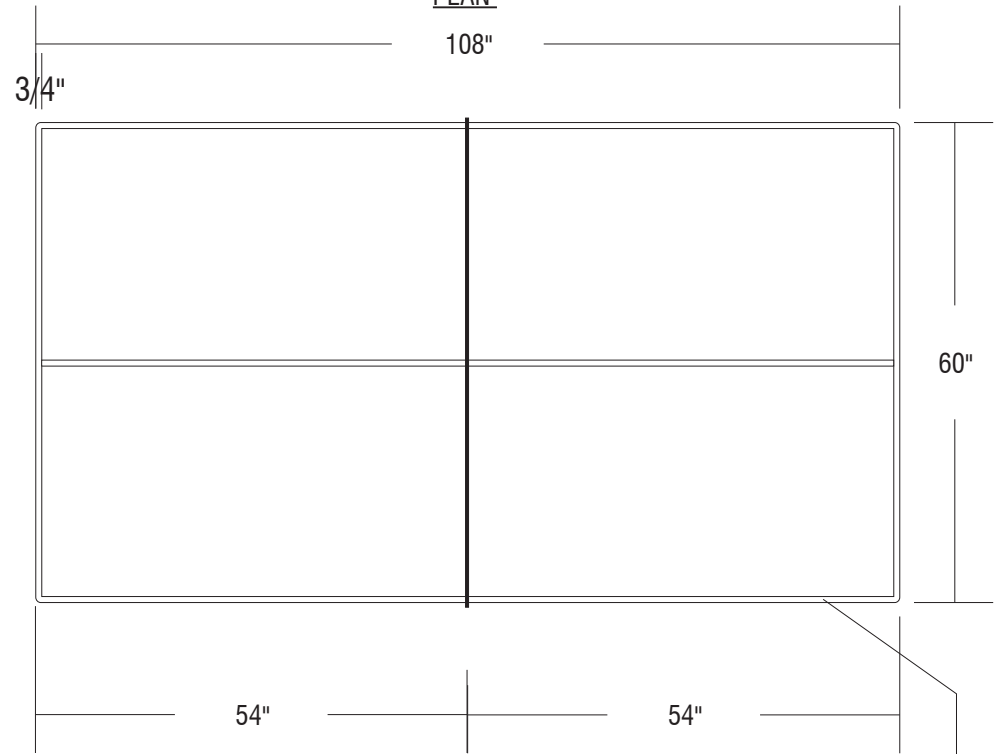

3/4" FIELD LINES PAINTED ON
 TABLE TOP - WHITE


ELEVATION

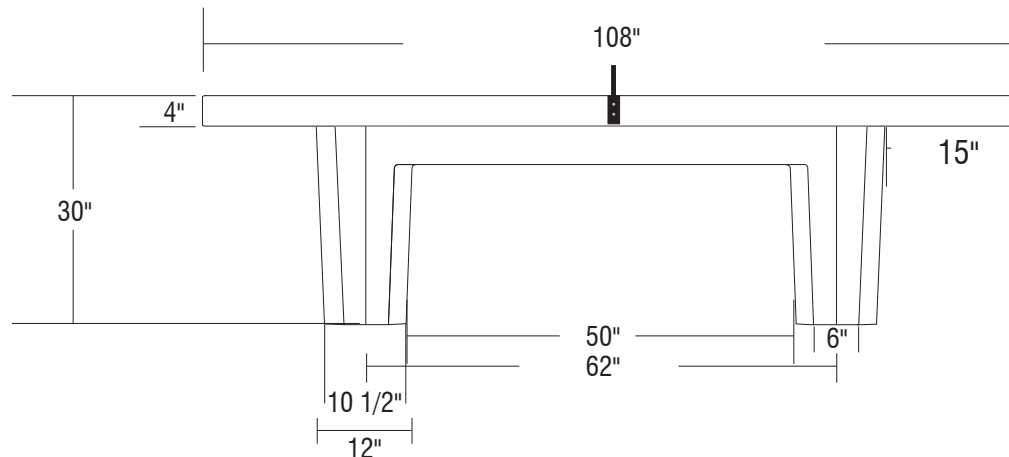

NOTES:

1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

WEIGHT: 4500 LBS
 TEXTURE:
 COLOR:
 SEALER:



**OUTDOOR
 CREATIONS
 INC.**
 2270 Barney Street
 Anderson, CA 96007
 (530) 365-6106
 FAX (530) 365-5129