

MODEL #513 CONCRETE SIDE OPENING TRASHCAN WITH HOLES ON TOP, FLAT SIDES


OUTDOOR CREATIONS, INC.

SCALE: 1" = 24"

CUSTOMER APPROVAL x \_\_\_\_\_

DRAWN BY: MNC


FRONT ELEVATION

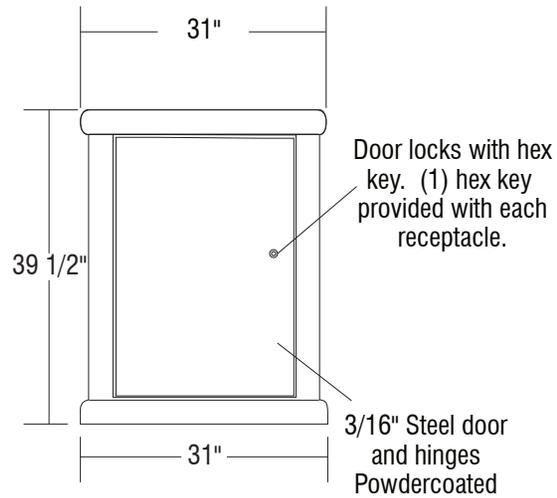

Door locks with hex key. (1) hex key provided with each receptacle.


3/16" Steel door and hinges Powdercoated

SIDE ELEVATION

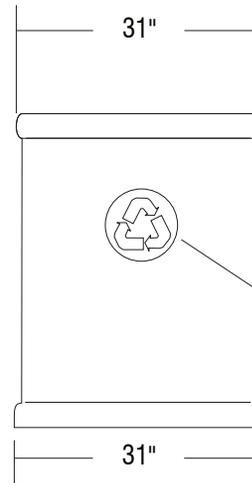

(2) Cast in recycling logos, 9" dia., on sides of unit Logos painted blue background with white arrows


PLAN

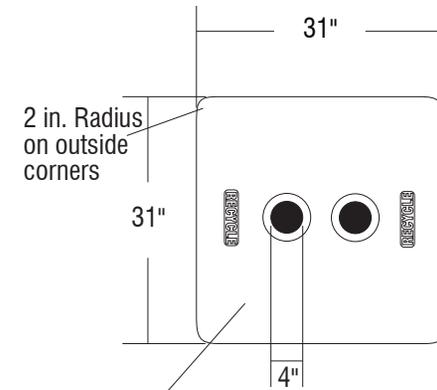

2 in. Radius on outside corners

Top of unit painted Recycle Blue with two Recycling Holes and "RECYCLE" text cast in and painted white

BOTTOM VIEW

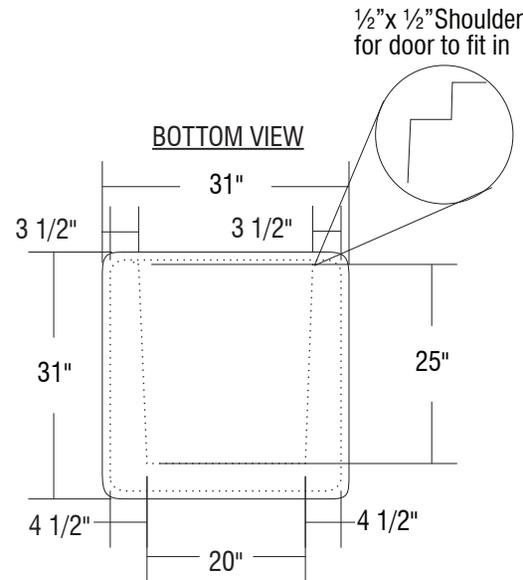

1/2" x 1/2" Shoulder for door to fit in

-40 Gallon Capacity (Liner Included)

NOTES:

1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

WEIGHT: 1650 LBS  
TEXTURE:  
COLOR:  
SEALER:



**OUTDOOR CREATIONS INC.**  
2270 Barney Street  
Anderson, CA 96007  
(530) 365-6106  
FAX (530) 365-5129