

MODEL #708 S/D - CONCRETE SIGN, 54"x108"

OUTDOOR CREATIONS, INC.


SCALE: 1" = 18"

DATE:

DRAWN BY: MNC

(2) 14 1/4" square relief  
1/4" deep. Includes 45 deg. Chamfer  
Around inset and (4) 1/4" threaded  
Inserts for fastening.

Acrylic logos provided with  
Sign. Attached to inset area  
With 1/4" stainless steel  
Security type fasteners

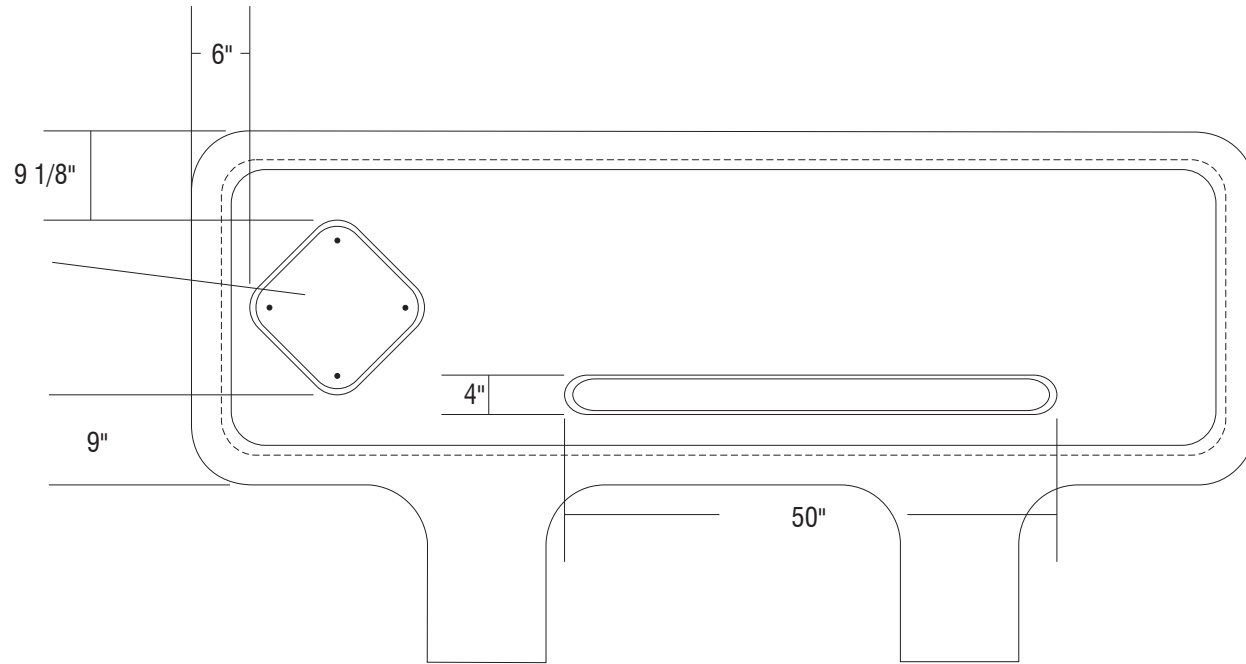

NOTES:


1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

WEIGHT: 2600 LBS  
TEXTURE:  
COLOR:  
SEALER:



**OUTDOOR  
CREATIONS  
INC.**  
2270 Barney Street  
Anderson, CA 96007  
(530) 365-6106  
FAX (530) 365-5129

ELEVATION

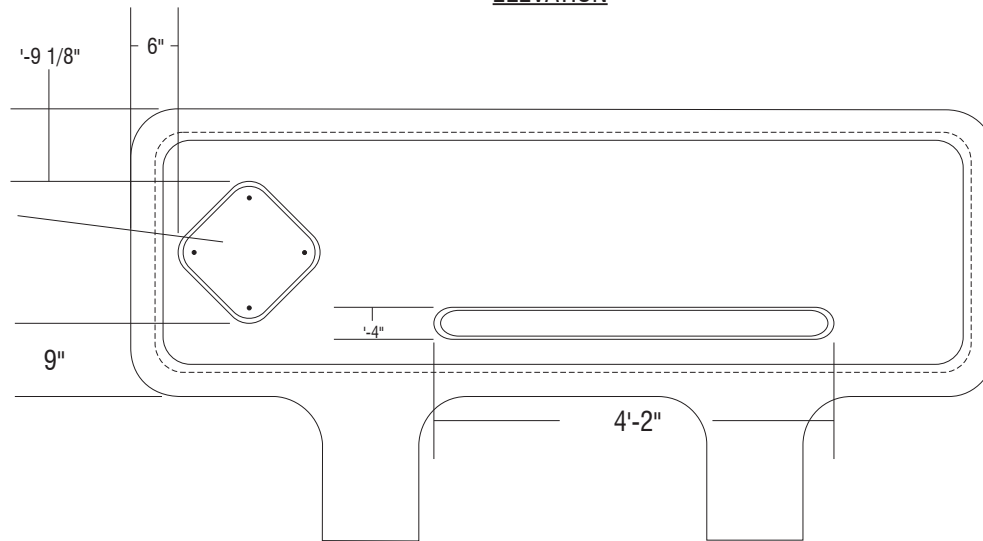

(2) 14 1/4" square relief  
1/4" deep. Includes 45 deg. Chamfer  
Around inset and (4) 1/4" threaded  
Inserts for fastening.

Acrylic logos provided with  
Sign. Attached to inset area  
With 1/4" stainless steel  
Security type fasteners

Notes:

1. Coloring agents are to be pure mineral oxides and shall be mixed integrally with cement.
2. Concrete mix design to include 8.5 sacks Portland cement per yard with maximum rock size of 3/4" reinforced with #4 and #5 rebar grid. Cured concrete shall attain minimum compressive strength of 7,000 P.S.I..
3. All formed surfaces and edges shall be fully rounded and smooth finished. Finish of all exposed surfaces to have a concrete graffiti-resistant sealer applied.
4. Minimum Weight of sign to be 2500lbs.
5. Minimum Thickness of sign to be 8 in,

\*Shown is a recommendation. Local code/engineering requirements are the responsibility of others.

Recommended Attachment to Footing:  
Sign to be attached using (4) 3/4" X 15" threaded coil rods threaded into cast-in coil inserts in base of sign leg ((2) each per leg).  
Footing to have corresponding grout pockets (3" pipe) cast in to leg mounting points as shown in footing  
Pockets to be filled with non-shrink grout prior to sign/coil rods being lowered in to footing/grout pockets.  
Epoxy to be applied between sign leg and footing for final securing.

