MODEL #101FSSKRE CONCRETE PICNIC TABLE WITH RIGHT SIDED WHEELCHAIR ACCESSIBLITY AND ANTI-SKATE BUMPS	OUTDOOR CREATIONS, INC.	SCALE: 1" = 32"	MAN. TOL. +/- 1/4"
	CUSTOMER APPROVAL x_____	DRAWN BY: MNC	

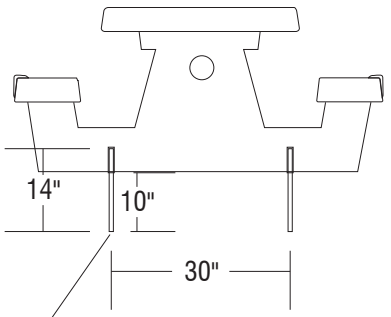

(2) 3/4" x 14" coil rods (provided) to correspond to in footing grout pockets (by others)

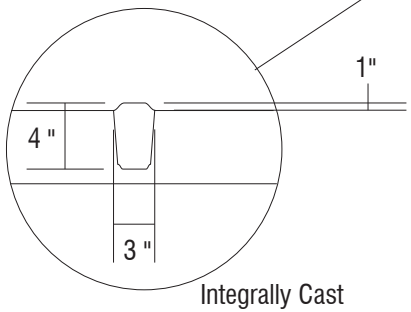

Integrally Cast Anti-Skateboard System

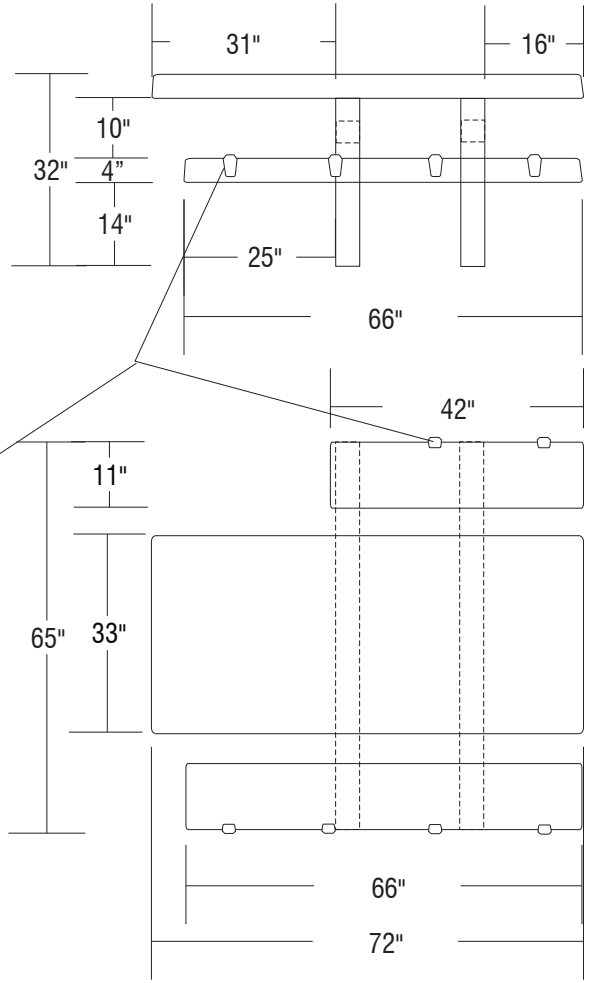

NOTES:
1. Concrete mix design to include a mixture of Portland Cement, water, coarse and fine aggregates, pure mineral oxide coloring agents (when applicable) to yield a minimum compressive strength of 5000 psi.
2. Final product shall be reinforced with #4 and #5 rebar grid.
3. Product is cast in 1-piece with no assembly required.
4. Hairline cracks may develop over time. These are not structural failures, but inherent characteristics of the material itself.
5. Air pockets are a common occurrence in precast products. The frequency and size of air pockets are variable and to be expected, especially on vertical surfaces.
6. Concrete corners and edges will chip if not handled according to guidelines. Patch kits are available but may or may not blend and can be variable.
7. There is a level of care and maintenance associated with your product and is the responsibility of the end user. Choosing the right sealer can help minimize those costs.

*TABLE MUST BE MECHANICALLY ATTACHED TO MOUNTING SURFACE

WEIGHT: 1650 LBS
TEXTURE:
COLOR:
SEALER:

OUTDOOR CREATIONS INC.
2270 Barney Street
Anderson, CA 96007
(530) 365-6106
FAX (530) 365-5129